


REVISION	ZONE	DESCRIPTION	DATE	DRWN	APVD
SHT2	SHT1				
B		DRR-1529	MAR15.07	JM	
C		DRR-1712	OCT.27.08	JM	
D	A4	DRR-1736	FEB.3.09	KP	

WIRES CONNECTED TO CONTROL PANEL: 2, 3C, 3S

SHIELDED: X1, X2, X3 (WITH REMOTE POT ONLY)

WIRES GOING INTO VFD MUST BE SHIELDED AND ONE END GROUNDED

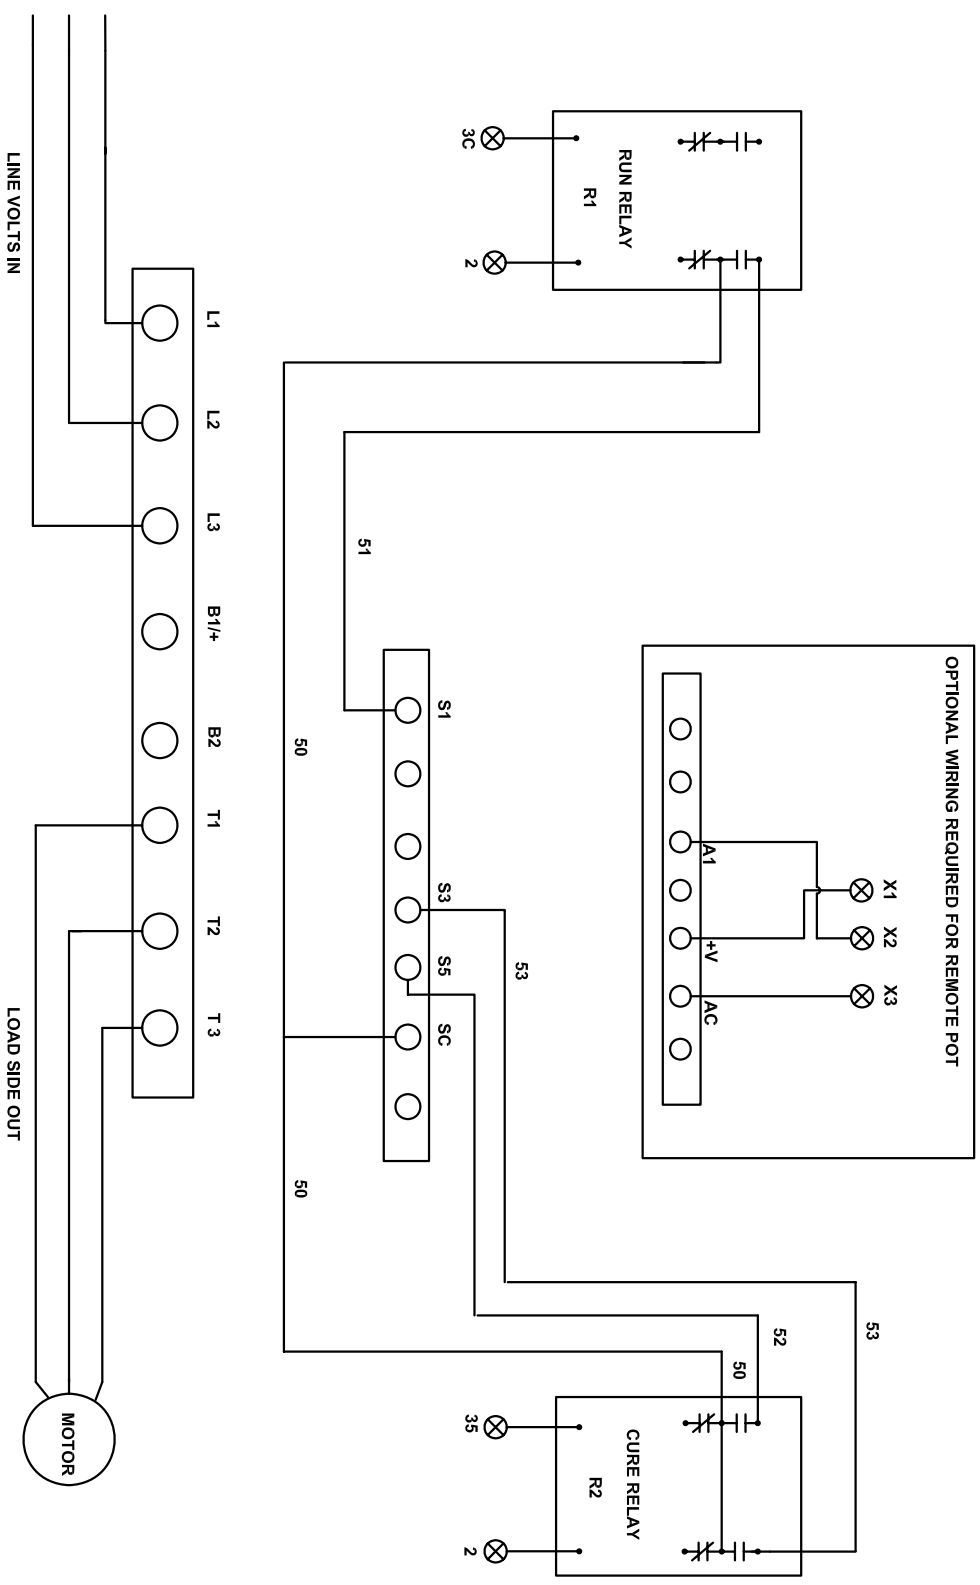

**PROGRAM PARAMETERS**  
 b1-01=1 WITH REMOTE POT  
 b1-01=0 WITHOUT REMOTE POT  
 C1-01=7.0 SPRAY ACCEL TIME (SEC)  
 C1-02=7.0 SPRAY DECEL TIME (SEC)  
 C1-03=10.0 CURE ACCEL TIME (SEC)  
 C1-04=100 CURE DECEL TIME (SEC)  
 d1-01=60 FREQUENCY REFERENCE  
 d1-17=36.0 FIXED FREQUENCY IN CURE  
 E1-05=MOTOR NAME PLATE VOLTS  
 E2-01=MOTOR FULL LOAD AMPS  
 H1-03=7, H1-05=6, L2-01=1, L5-01=5

DATE: FEB. 5, 07	DRAWN BY/DATE: J. MEECE	TITLE: BANANZA
REVIEWED BY/DATE:	APPROVED BY/DATE:	YASKAWA J1000 1 POT VFD
3 DECIMAL PLACES ±.002	2 DECIMAL PLACES ±.015	7.5HP OR LESS
ANGLES ±1°	UNITS: INCHES	SCALE: NONE
FINISH:	DWG TYPE: ENG	LOCATION: B/FLO
	SHEET: 1 OF 1	