


BLOWER/BURNER HEAT SECTION

V-BANK FILTER INLET
SECTION DAMPER

FRESH AIR H00D

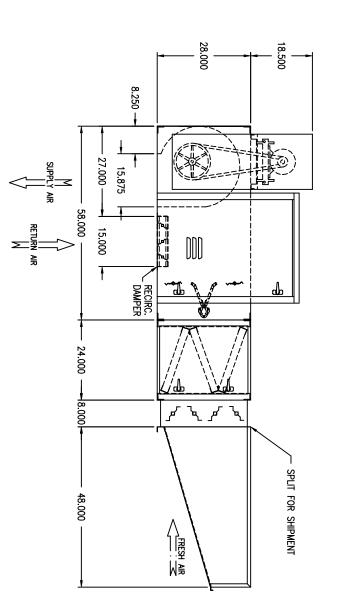

NOTE:

1.) DRAWING IS NOT TO SCALE.

2.) THIS SUBMITTAL ONLY APPLICABLE TO DIRECT FIRED BURNER.

3.) DUE TO SHIPPING REQUIREMENTS, SOME ELECTRICAL RECONNECTION MAY BE REQUIRED.

## MODEL

AirRite TT Series 115 HBL Outdoor

## STANDARD FEATURES

ADJUSTABLE BURNER PROFILE DAMPERS MIDCO BURNER MAXITROL TEMPERATURE CONTROL SYSTEM HEAT & RUST RESISTANT INTERIOR FINISH AIR INLET SCREEN (OUTDOOR UNITS ONLY) AIR PROVING SWITCH BELT GUARD (PER OSHA STANDARDS) LUBRICATED BEARINGS W/ ZIRK FITTINGS UNIT MTD CONTROL MODULE 16 GAUGE CRS CASING (1) 15" DWDI FORWARD CURVED BLOWER FACTORY TESTED ELECTRONIC FLAME SUPERVISION INDUSTRIAL ENAMEL EXTERIOR FINISH TESTED TO ANSI Z83.4 & Z83.18

IF CURB IS REQUIRED:  $2^{\circ} \times 2^{\circ}$  CURB ANGLE WILL BE ADDED TO BASE OF UNIT

PRELIMINARY

